

G Fridge freezer digital thermometer


- Easy to read large LCD display. • Temperature range: -24.9 to +69.9°C with a resolution of 0.1°C and an accuracy of $\pm 1^\circ\text{C}$.
- Max/min memory function to record the highest and lowest temperatures. • Internal sensor for the room temperature.
- Remote water resistant probe with one metre PVC lead for the appliance temperature.
- Programmable high/low audible alarm. • ABS case with incorporated foot stand.
- Suction pad and mounting bracket supplied.



Code	Price £ each 1-2	Price £ each 3-4	Price £ each 5+
428628DZ1	10.29	9.79	9.29

I Splash proof pen type probe thermometer

- Ideal for liquid and semi-solid sampling. • Temperature range: -50°C to 330°C with a resolution of 0.1°C. • Stainless steel probe.
- Data hold function retains the displayed value.
- Auto power off after 15 minutes of no activity.
- Polycarbonate case and protection sheath.
- Dimensions: L150mm x D4mm.

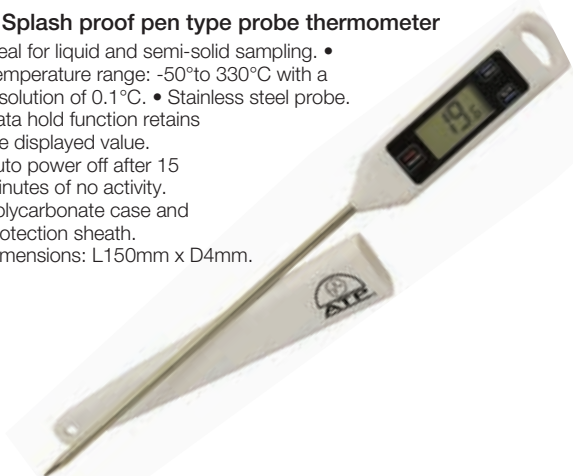

Code	Price £ each 1-2	Price £ each 3+
380526DZ1	12.45	11.95

K ThermaGuard® pharmaceutical thermometer

- High accuracy fridge temperature monitoring of vaccines, medicines and food.
- Large LCD display simultaneously displays current and max/min recorded temperatures.
- Programmable high & low audible alarms.
- Splash-proof IP54 ABS case with additive to reduce bacterial growth.



Code	Price £ each 1-2	Price £ each 3-4	Price £ each 5+
428629DZ1	88.25	83.89	79.40

H Legionnaires' premium water temperature thermometer kit

- Use to monitor the temperatures of standing water and water system surfaces.
- Temperature range: -99.9 - +137.2 °C with a 0.1 °C or 1 °C resolution.
- Penetration probe for tap water temperatures.
- Ribbon Surface probe for pipe surfaces and tanks.
- PTFE wire probe for difficult to reach areas.
- FREE traceable certificate of calibration.




Code	Price £ each	Price £ each 1-2	Price £ each 5+
428331DZ1	163.00	155.00	146.00

Current legislation means that you must organise a legionella risk assessment if you are an employer or person in control of premises and applies to all workplace hot and cold water systems regardless of their capacity.

J Digital min max alarm thermometer with probe

- For liquid and semi-solid sampling.
- The stainless steel probe is connected to the unit with a 1 metre cable but can be clipped to the instrument body for single-handed use.
- Impact resistant ABS case incorporates a desk stand and compartment for the sensor cable when not in use.
- Supplied with a probe protector cap & battery.

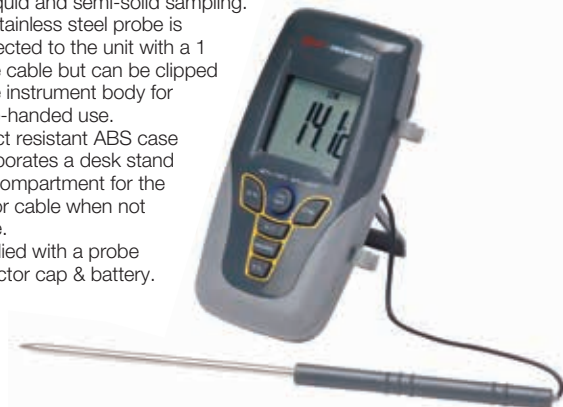

Code	Price £ each 1-2	Price £ each 3+
359012DZ1	36.40	34.85

L Wood and aggregate moisture meter, 1-45%

- Pocket-sized digital moisture meter with integrated electrodes. • Suitable for wood - sawn timber, cardboard, paper and aggregate materials - plaster, concrete, mortar. • Measures the electrical resistance and converts it to display % moisture content. • Supplied with protective cap, belt/pocket clip and batteries.



Code	Price £ each 1-2	Price £ each 3+
389187DZ1	76.95	72.80

