

## E Slip resistant PVC roof walkway matting




- Safe access in all weather conditions. • Slip resistant PVC covering with excellent drainage. • Resists bacterial growth.
- Easy to lay and maintenance free.
- Available in 10m rolls, or per linear metre. • Thickness: 14mm.



Colour	Width mm	10m roll Code	Price £ per roll	Linear metre Code	Price £ per m
Grey	600	313519DX8	420.00	385300DX8	50.99
Grey	910	313520DX8	626.00	385301DX8	76.99
Grey	1220	415772DX8	884.00		
Black	600	415774DX8	420.00	415776DX8	50.99
Black	910	415775DX8	626.00	415777DX8	76.99
Black	1220	415773DX8	884.00		

## G Fibreglass grating

- Strong and slip resistant.
- Resists most corrosive salts, acids, alkalis and other chemicals.
- UV resistant and non-conductive.
- Approx. 40% lighter than equivalent metal grating.
- Mesh size: 38 x 38mm.
- Grey grating for general purpose use.
- Green grating offers greater chemical corrosion resistance and fire resistance to ASTM E84 & D635.
- Simple to cut and install.
- Ideal for flooring, platforms, walkways, assembly lines, trench covers, stairs and ramps.

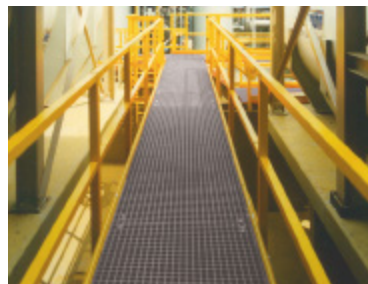

Panel W x L x D mm	Grey Code	Green Code	Price £ each
995 x 3050 x 26	314813DX8	314812DX8	274.00
995 x 3050 x 38	314811DX8	314810DX8	390.00
1219 x 3660 x 26	314817DX8	314816DX8	414.00
1219 x 3660 x 38	314815DX8	314814DX8	561.00

**NB.** Other grades of grating are available on request to more specifically meet the needs of differing applications.

## F Recreation ground rubber safety matting

- Natural rubber matting with moulded, slip resistant, cellular structure.
- Absorbs impact for safe surfacing in playgrounds and outdoor public areas. • Grass penetration establishes a firm bond to the ground, hiding the matting. • Improves ground drainage and erosion protection in areas used frequently. • Simple to install - no toxic chemicals or adhesives required. • Proven alternative to wet-pour and rubber tile safety surfaces. • Easy to maintain - mow grass with standard mower once established. • Dimensions: L1500 x W1000 x D23mm.
- BSEN 1177-1998 - Critical fall height: 2.8m.
- BS7188 1998 method 7 - Ignition: Best flammability safety category. Erosion control option stabilises and controls surface erosion caused by foot traffic, vehicles and excessive rainfall in temporary car parks, landscape gardening, golf courses, stables etc.



Code	Description	Price £ each 1-3	Price £ each 4-8	Price £ each 9+
413510DX8	Recreation safety matting	54.49	51.99	49.49
413509DX8	Erosion control environmental matting	57.49	54.49	51.99

## H Rubber duckboard walkway matting

- Durable, open grid and slip-resistant, for comfort and safety.
- Suitable for industrial long-term use.
- Drainage holes and raised studs allow fluid and debris to fall through.
- Dimensions: L1500 x W1000 x D23mm.
- May be linked using optional black connectors for larger areas.



Code	Description	Price £ each 1-3	Price £ each 4-8	Price £ each 9+
413462DX8	Mat	55.99	53.49	50.99
413463DX8	Connector	4.49	4.29	4.09