

G TPR tyred plate fixing twin wheel castor

- Thermoplastic rubber (TPR) tread. • Plain bearings. • Nylon centre.
- Top plate size: 60 x 60mm. • Fixing hole centres: 38x38mm to 48x48mm, M6.



Swivel (G1)

Swivel with total-stop brake (G2)

Code	No.	Wheel dia. mm	Tread width mm	Fitted height mm	Load cap. kg	Price £ each
384999DZ1	G1	50	20 x 2	71	80	8.15
385000DZ1		75	25 x 2	103	100	13.15
385001DZ1	G2	50	20 x 2	71	80	10.59
385002DZ1		75	25 x 2	103	100	17.25

H TPR tyred bolt hole fixing twin wheel castor

- Thermoplastic rubber (TPR) tread.
- Plain bearings. • Nylon centre.
- M10 fixing hole.



Swivel (H1)

Swivel with total-stop brake (H2)

Code	No.	Wheel dia. mm	Tread width mm	Fitted height mm	Load cap. kg	Price £ each
385003DZ1	H1	50	20 x 2	71	80	7.75
385004DZ1		75	25 x 2	100	100	12.65
385005DZ1	H2	50	20 x 2	71	80	10.05
385006DZ1		75	25 x 2	100	100	16.69

I Nylon wheel plate fixing castor

- Ball bearings. • Tread width 30mm. • Top plate 105 x 80mm. • Fixing centres 72 x 52mm to 80 x 60mm, M8. • Thread guards.



Swivel (I1)

Fixed (I3)

Swivel with total-stop brake (I2)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price £ each
384164DZ1	I1	75	105	100	12.65
384165DZ1		100	130	150	13.15
384166DZ1		125	156	170	14.75
384167DZ1	I2	75	105	100	9.69
384168DZ1		100	130	150	10.79
384169DZ1		125	156	170	11.99
384170DZ1	I3	75	105	100	14.89
384171DZ1		100	130	150	18.05
384172DZ1		125	156	170	21.25

J Nylon wheel bolt hole fixing castor

- Ball bearings. • Tread width 30mm.
- M12 fixing hole. • Thread guards.




Swivel (J1)

Swivel with total-stop brake (J2)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price £ each
384173DZ1	J1	75	102	100	12.65
384174DZ1		100	128	150	13.10
384175DZ1		125	155	170	14.75
384176DZ1	J2	75	102	100	18.99
384177DZ1		100	128	150	18.05
384178DZ1		125	155	170	21.25

K TPR tyred, nylon centre plate fixing castor

- Thermoplastic rubber (TPR) tread, width 30mm. • Ball bearings.
- Top plate 105 x 80mm. • Fixing centres 72x52mm to 80x60mm, M8.
- Thread guards.

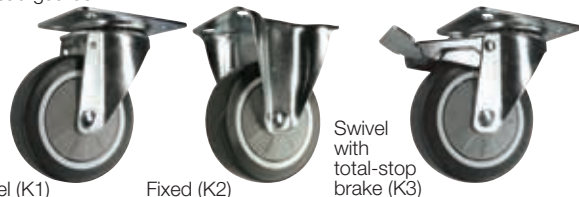

Swivel (K1)

Fixed (K2)

Swivel with total-stop brake (K3)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price £ each
377210DZ1	K1	75	105	80	11.85
377214DZ1		100	130	100	13.55
377218DZ1		125	156	120	15.19
384158DZ1	K2	75	105	80	10.45
384159DZ1		100	130	100	11.15
384160DZ1		125	156	120	12.35
377222DZ1	K3	75	105	80	15.29
377226DZ1		100	130	100	18.65
377230DZ1		125	156	120	21.95

L TPR tyred, nylon centre bolt hole fixing castor

- Thermoplastic rubber (TPR) tread, width 30mm.
- Ball bearings. • M12 fixing hole.
- Thread guards.



Swivel (L1)

Swivel with total-stop brake (L2)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price £ each
377208DZ1	L1	75	102	80	12.65
377212DZ1		100	128	100	13.55
377216DZ1		125	155	120	15.19
377220DZ1	L2	75	102	80	15.29
377224DZ1		100	128	100	18.65
377228DZ1		125	155	120	21.95