

Speedy folding aluminium access tower

- Mobile aluminium scaffold. Lockable castors. Compact folding base makes for easy storage, transportation & assembly. • Supplied complete with protective toe boards & stabilisers. • Floor area 1.48 x 0.58m.
- Trap door 600 x 510mm. Suitable for Indoor & outdoor use on flat or uneven surfaces. • Complies to EN1004-1 & 3T assembly methods.








Castors

Multi surface functionality

Locking mechanism

Code	Includes	Max. Working height m	Max. Platform height m	Price £ each
426722DX8	Folding base unit tower with toe boards, 4 braked castors, platform, 4 braces, 1 diagonal & 4 stabilisers	2.6	0.6	999.00
426755DX8	As 426722 + 1m ext. & additional brace	3.6	1.6	1159.00
426756DX8	As 426755 + 1.75m ext, 4 braces, 2 diagonals & additional platform	5.35	3.5	1599.00
426757DX8	As 426756 + 1.75m ext. + 4 diagonals	7.10	5.1	1859.00

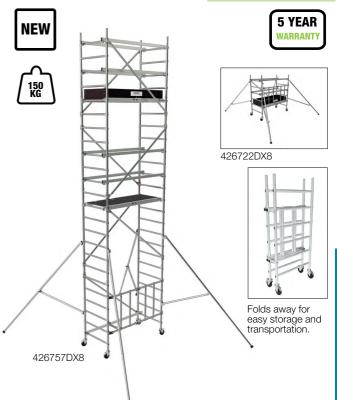

Counterbalanced access tower

- Counter balanced platform raises manually.
- No hydraulics or batteries. Sets up in seconds entirely from ground level.
- Maximum working height 3.9m.
- Latches every 250mm upto maximum height.
- 800mm outreach for over-desk access.
- Permanently fixed toe boards and handrails.
- Wheels and stabiliser arms included.
- Fits through doors.
- 90kg min. weight with stabilisers detached.
- Capacity:150kg max.
- · Can be used without PASM or IPAF qualifications.
- BS EN 1004:2004 certified.





3.9m max. working height

Over desk access

Price £ each

