

## D Ground level container access ramp

- Allows access to containers located at ground level.
- One piece with steady sloping incline to access the container floor.
- Working platform option allows horizontal access and prevents tightly packed goods from impacting the container top.
- Can be transported by fork lift truck (ramp only has front access, ramp and platform has side access).
- Made in the UK.



Ramp only



Platform and ramp only

Code	Description	W x L mm	Max. load cap. Kg	Weight Kg	Price £ each
394580DX8	Steel ramp	2200 x 1250	6000	275	1199.00
394581DX8	Steel ramp	2200 x 1250	10000	290	1524.00
394582DX8	Steel ramp and platform	2200 x 3000	6000	750	3161.00
394583DX8	Steel ramp and platform	2200 x 3000	10000	860	3491.00

## E Utility ramp

- Great solution for wheelchair or industrial use.
- Mobile and easy to use - simply wheel along and lay down in position ready to use (no wheels on 900 and 1200mm long ramps).
- Anti-slip surface.
- Manufactured in the UK.



Length mm	Capacity kg	760mm wide			900mm wide		
		Code	Weight Kg	Price £ each	Code	Weight Kg	Price £ each
900	400	390795DX8	9	486.00	390801DX8	10.5	589.00
1200	400	390796DX8	12.5	577.00	390802DX8	14.5	719.00
1500	400	390797DX8	15.5	689.00	390803DX8	18.5	845.00
1800	400	390798DX8	19	799.00	390804DX8	22	975.00
2100	350	390799DX8	22.5	909.00	390805DX8	26	1089.00
2400	300	390800DX8	25.5	1009.00	390806DX8	30	1199.00

## F Heavy duty loading bay buffers

- Made of anti-aging polyurethane, moulded with perforated steel reinforcing plate.
- Quickly and easily installed.
- Harder wearing and longer lasting than conventional rubber.
- Hollow sections maximise shock absorption, three profile shapes.
- Choice of 3 sizes.



Code	H x D x L mm	Price £ each
394539DX8	90 x 35 x 1000	132.00
394541DX8	120 x 50 x 1000	181.00
394543DX8	100 x 80 x 1000	206.00

## G Trailer safety support


- Designed to provide additional support under the fifth wheel of a parked container, without a cab, during loading and unloading.
- The maximum supporting load required varies greatly depending on trailer type, weight distribution and the nature of the load, however typically requirements are in the region of 20 tonnes.
- Choice of 2 capacities:
- 26,500Kg for most 'normal' applications.
- 36,500Kg for 'abnormal' applications i.e. military equipment.
- Min. height: 1075mm.
- Max height: 1275mm.



Code	Supporting capacity kg	Price £ each
429237DX8	26500	989.00
429238DX8	36500	1097.00

## H Dock lights

- Moves in two planes and pivots at three points, allowing the light to be accurately positioned to illuminate the inside area of a vehicle during loading and unloading.
- IP rating of IP54, ideal for both indoor and outdoor applications.
- Features 18w LED array, for minimal power consumption, providing approximately 900 lumens light output.
- Switches included for stand alone operation or can be supplied without switches for integration into existing controls.
- Arm length 1000mm when fully extended.

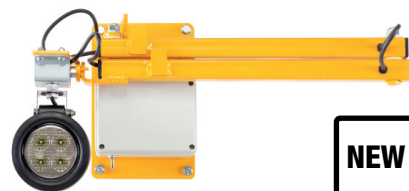

Code	Price £ each
429236DX8	367.00