


Matting & Flooring Clean Room Mats

A Welding bay anti fatigue mat

- Heavy duty, flame retardant top surface.
- Soft foam underlayer with pyramid profile provides anti-fatigue cushioning.
- Bevelled edges help prevent trip risk.
- Ideal for demanding industrial use.
- Classified as fire test CF1-S1.
- Thickness: 12.5mm.

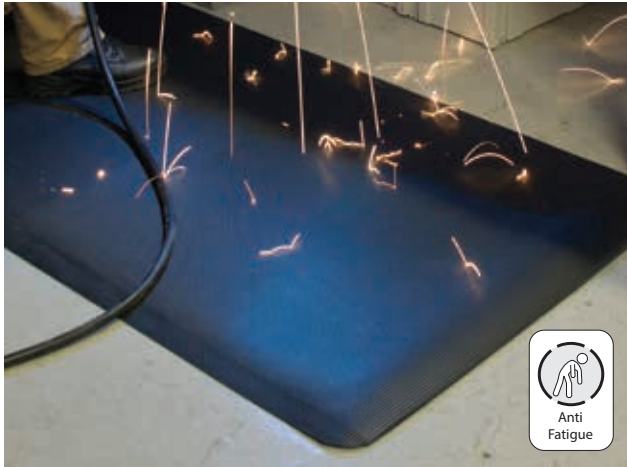

NB. Cut lengths must be ordered in multiples of 1m.

Code	Description	W x L mm	Price € each 1-2	Price € each 3+
385015RN6	Mat	900 x 600	104.00	101.00
385016RN6	Mat	1500 x 900	261.00	254.00
385017RN6	Cut lengths	1000 x 900	162.00	158.00

C Electrical safety matting

- Specialist electrical insulating matting. Protects against very high voltages. • Fine ribbed slip resistant rubber surface helps provide a more comfortable and firmer footing. • Colour coding on reverse depicts classification. • Supplied in 1m widths, and 3 thicknesses:
- 3mm/Red - Class 0, tested to 10kV, 1kV working voltage, 4mm/Yellow - Class 2, tested to 30kV, 17kV working voltage, 5mm/Orange - Class 4, tested to 50kV, 36kV working voltage. • 10m rolls, or cut to length in multiples of 1m.



Please note cut lengths are non-returnable

Colour code	10m rolls	Price € per roll	Cut lengths	Price € per metre 1-3	Price € per metre 4+
	Code		Code		
Red	391958RN6	496.00	391959RN6	81.59	79.59
Yellow	388046RN6	679.00	388047RN6	94.74	92.39
Orange	388048RN6	1029.99	388049RN6	125.00	122.00

B ESD anti-static earthing mat

- Anti static floor mat protects operatives from static build-up.
- Tough and long lasting with anti-fatigue properties.
- Fitted with one 10mm male grounding stud.
- Resistance: $1 \times 10^9 \Omega$ to $1 \times 10^{10} \Omega$. • Colour - grey. • Thickness - 9mm.
- Easy to clean. • Maximum performance when used with grounding wire and plug - sold separately.



Code	Description	W x L mm	Price € each 1-3	Price € each 4+
328588RN6	Mat	600 x 900	75.44	73.59
328586RN6	Mat	900 x 1500	183.00	178.00
328587RN6	Roll	900 x 18300	1689.99	1648.00
328589RN6	Cut length	900 x Linear M.	106.00	103.00

NB. These mats do NOT provide electrical shock protection.

ESD anti-static earthing accessories

- For use with ESD anti-static earthing mats.

Code	Description	Price € each 1-3	Price € each 4+
373384RN6	Earth bonding point plug	18.30	17.85
373387RN6	Grounding lead, 2m length	22.10	21.55

D Low voltage electrical safety matting BS921/1976

- Designed for use in front of open switchboards and high voltage equipment. • Provides safety for operatives against electrical shocks.
- Ribbed rubber surface to give slip resistance. • 6mm - recommended for single-phase, tested to 11kV for 450V rated working.
- 9.5mm - recommended for 3-phase, tested to 15kV for 650V rated working (conforms to BS921/1976).
- 10m rolls, or cut to length in multiples of 1m.



Please note cut lengths are non-returnable

Height mm	Width mm	10m rolls	Price € per roll 1-2	Price € per roll 3+	Cut lengths
		Code			Code Price € per metre
6	900	357749RN6	341.00	332.00	357750RN6 46.74
6	1200	357751RN6	397.00	387.00	357752RN6 58.04
9	900	357753RN6	524.00	511.00	357754RN6 68.64
9	1200	357755RN6	681.00	664.00	357756RN6 74.99