

Safety & Security Dock Equipment / Safety Rail System

A Ground level container access ramp

- Allows access to containers located at ground level.
- One piece with steady sloping incline to access the container floor.
- Working platform option allows horizontal access and prevents tightly packed goods from impacting the container top.
- Can be transported by fork lift truck (ramp only has front access, ramp and platform has side access).
- Made in the UK.




Code	Description	W x L mm	Max. load cap. Kg	Weight Kg	Price € each
394580RN6	Steel ramp	2200 x 1250	6000	275	1617.00
394581RN6	Steel ramp	2200 x 1250	10000	290	2125.00
394582RN6	Steel ramp and platform	2200 x 3000	6000	750	4511.00
394583RN6	Steel ramp and platform	2200 x 3000	10000	860	5038.00

**UK
MADE**

B Heavy duty loading bay bumpers

- Made of anti-aging polyurethane, moulded with perforated steel reinforcing plate.
- Quickly and easily installed.
- Harder wearing and longer lasting than conventional rubber.
- Hollow sections maximise shock absorption, three profile shapes.
- Choice of 3 sizes.

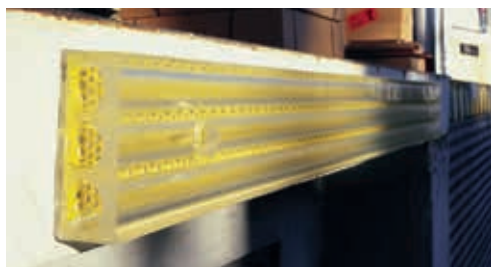

Code	H x D x L mm	Price € each
394539RN6	90 x 35 x 1000	261.00
394541RN6	120 x 50 x 1000	317.00
394543RN6	100 x 80 x 1000	342.00

D Rubber dock bumpers

- Rubber dock bumpers.
- Reduce damage to loading docks, equipment and buildings.
- Ideal for protecting vehicles and buildings.
- "D-section" dock bumpers available in 3 lengths, with or without fixing holes.
- Moulded rectangular bumpers available in various sizes and thicknesses.



Code	Type	L x D mm	No. of holes	Price € each
433235RN6	Extruded D section	1000 x 100	0	145.00
433236RN6	Extruded D section	2000 x 100	0	289.00
433237RN6	Extruded D section	3000 x 100	0	426.00
433238RN6	Extruded D section	1000 x 100	3	174.00
433239RN6	Extruded D section	2000 x 100	5	329.99
433240RN6	Extruded D section	3000 x 100	7	481.00
330102RN6	Moulded	254 x 76	2	65.69
374928RN6	Moulded	457 x 50	2	83.59
330104RN6	Moulded	457 x 101	2	168.00
330105RN6	Moulded	457 x 150	2	199.99
374931RN6	Moulded	762 x 50	3	129.99
429235RN6	Moulded	762 x 101	3	191.00

C Trailer safety support

- Designed to provide additional support under the fifth wheel of a parked container, without a cab, during loading and unloading.
- The maximum supporting load required varies greatly depending on trailer type, weight distribution and the nature of the load, however typically requirements are in the region of 20 tonnes.
- 36,500Kg supporting capacity.
- Min. height: 990mm.
- Max height: 1295mm.



Code	Price € each
433245RN6	1571.00



433235RN6



433236RN6



330102RN6



330105RN6