

G TPR tyred plate fixing twin wheel castor

- Thermoplastic rubber (TPR) tread. • Plain bearings. • Nylon centre.
- Top plate size: 60 x 60mm. • Fixing hole centres: 38x38mm to 48x48mm, M6.



Swivel (G1)

Swivel with total-stop brake (G2)

Code	No.	Wheel dia. mm	Tread width mm	Fitted height mm	Load cap. kg	Price € each
384999RN6	G1	50	20 x 2	71	80	12.44
385000RN6		75	25 x 2	103	100	20.09
385001RN6	G2	50	20 x 2	71	80	16.14
385002RN6		75	25 x 2	103	100	26.34

H TPR tyred bolt hole fixing twin wheel castor

- Thermoplastic rubber (TPR) tread.
- Plain bearings. • Nylon centre.
- M10 fixing hole.



Swivel (H1)

Swivel with total-stop brake (H2)

Code	No.	Wheel dia. mm	Tread width mm	Fitted height mm	Load cap. kg	Price € each
385003RN6	H1	50	20 x 2	71	80	11.84
385004RN6		75	25 x 2	100	100	19.30
385005RN6	H2	50	20 x 2	71	80	15.34
385006RN6		75	25 x 2	100	100	25.49

I Nylon wheel plate fixing castor

- Ball bearings. • Tread width 30mm. • Top plate 105 x 80mm. • Fixing centres 72 x 52mm to 80 x 60mm, M8. • Thread guards.



Swivel (I1)

Fixed (I3)

Swivel with total-stop brake (I2)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price € each
384164RN6	I1	75	105	100	19.30
384165RN6		100	130	150	20.09
384166RN6		125	156	170	22.50
384167RN6	I2	75	105	100	14.79
384168RN6		100	130	150	16.49
384169RN6		125	156	170	18.29
384170RN6	I3	75	105	100	22.74
384171RN6		100	130	150	27.54
384172RN6		125	156	170	32.44

J Nylon wheel bolt hole fixing castor

- Ball bearings. • Tread width 30mm.
- M12 fixing hole. • Thread guards.




Swivel (J1)

Swivel with total-stop brake (J2)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price € each
384173RN6	J1	75	102	100	19.30
384174RN6		100	128	150	19.99
384175RN6		125	155	170	22.50
384176RN6	J2	75	102	100	23.64
384177RN6		100	128	150	27.54
384178RN6		125	155	170	32.44

K TPR tyred, nylon centre plate fixing castor

- Thermoplastic rubber (TPR) tread, width 30mm. • Ball bearings.
- Top plate 105 x 80mm. • Fixing centres 72x52mm to 80x60mm, M8.
- Thread guards.

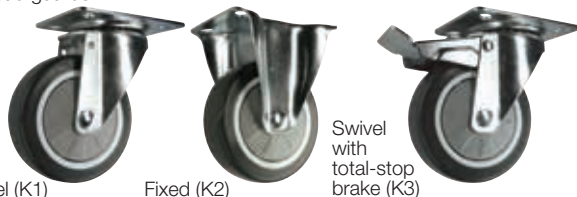

Swivel (K1)

Fixed (K2)

Swivel with total-stop brake (K3)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price € each
377210RN6	K1	75	105	80	18.09
377214RN6		100	130	100	20.69
377218RN6		125	156	120	23.19
384158RN6	K2	75	105	80	15.94
384159RN6		100	130	100	17.04
384160RN6		125	156	120	18.84
377222RN6	K3	75	105	80	23.34
377226RN6		100	130	100	28.44
377230RN6		125	156	120	33.49

L TPR tyred, nylon centre bolt hole fixing castor

- Thermoplastic rubber (TPR) tread, width 30mm.
- Ball bearings. • M12 fixing hole.
- Thread guards.



Swivel (L1)

Swivel with total-stop brake (L2)

Code	No.	Wheel dia. mm	Fitted height mm	Load cap. kg	Price € each
377208RN6	L1	75	102	80	19.30
377212RN6		100	128	100	20.69
377216RN6		125	155	120	23.19
377220RN6	L2	75	102	80	23.34
377224RN6		100	128	100	28.44
377228RN6		125	155	120	33.49