

F Photoluminescent glow in the dark fire exit signs


- 1.2mm rigid plastic. • Emergency exit signs are provided to guide you from wherever you are in a building, via a place of relative safety (the escape route) to the place of ultimate safety (the assembly area).
- Exceeds PSPA (The Photoluminescent Safety Products Association) Class C ratings, making it one of the best in the UK market and ensures our signs stay brighter for longer to give the maximum chance for a successful evacuation.



Description	100 x 300 Code	Price € each 1-4	Price € each 5-9	Price € each 10+	150 x 450 Code	Price € each 1-4	Price € each 5-9	Price € each 10+
Arrow up	431160RN6	16.64	16.25	15.85	431152RN6	29.69	28.95	28.25
Arrow down	431162RN6	16.64	16.25	15.85	431157RN6	29.69	28.95	28.25
Arrow left	431155RN6	16.64	16.25	15.85	431159RN6	29.69	28.95	28.25
Arrow right	431161RN6	16.64	16.25	15.85	431154RN6	29.69	28.95	28.25
Arrow down and left	431166RN6	16.64	16.25	15.85	431164RN6	29.69	28.95	28.25
Arrow down right	431167RN6	16.64	16.25	15.85	431163RN6	29.69	28.95	28.25
Arrow up and left	431180RN6	16.64	16.25	15.85				
Arrow up and right					431179RN6	29.69	28.95	28.25

G Photoluminescent fire exit and safety signs

- P.S.P.A Class B material. • Once fully charged will glow for over 10 hours. • UV resistant - suitable for internal or external use. • Tested to DIN 67510. • Visible even in complete darkness. • H x W: 200 x 300 mm.
- 431196RN6 and 431199RN6 H x W: 150 x 300mm • Choice of 2 materials: flexible vinyl (PHS) and 1.3mm rigid photoluminescent plastic (PHO). • Extended range online.

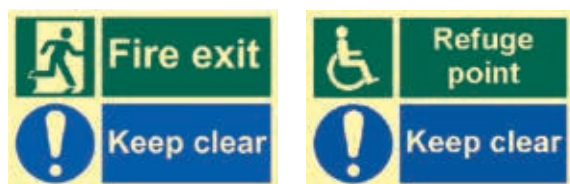


Description	PHS	Price € each	PHO	Price € each
Arrow up	421385RN6	18.14	421384RN6	26.09
Arrow down	421379RN6	18.14	421378RN6	26.09
Arrow right	421383RN6	18.14	421382RN6	26.09
Arrow left	421381RN6	18.14	421380RN6	26.09
Fire exit keep clear	419294RN6	18.14	419293RN6	26.09
Refuge point	421482RN6	18.14	421481RN6	26.09
Man running right	421199RN6	12.59	421196RN6	20.54



H Photoluminescent fire safety and fire door signs

- P.S.P.A Class B material. • UV resistant - suitable for internal or external use. • Tested to DIN 67510. • Choice of 2 materials: flexible vinyl (PHS) and 1.3mm rigid photoluminescent plastic (PHO).
- H x W: 100 x 300mm. • Extended range online.

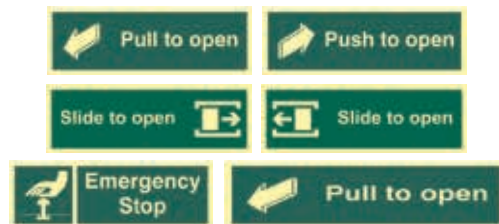

Description	PHS	Price € each	PHO	Price € each
Pull to open	422438RN6	10.84	422437RN6	20.54
Push to open	422448RN6	10.84	422447RN6	20.54
Emergency stop	422553RN6	10.84	422552RN6	20.54
Push bar to open	422443RN6	10.84	422442RN6	20.54
Slide left to open	422449RN6	10.84		
Slide right to open	422450RN6	10.84		

I Photoluminescent fire assembly signs

- P.S.P.A Class B material. • Once fully charged will glow for over 10 hours. • UV resistant - suitable for internal or external use.
- Tested to DIN 67510. • Choice of 2 materials: flexible vinyl (PHS) and 1.3mm rigid photoluminescent plastic (PHO).
- Fire assembly point sign H x W: 300 x 200mm.
- Disabled refuge point sign H x W: 200 x 150mm.



Description	PHS	Price € each	PHO	Price € each
Fire assembly point	422425RN6	18.14	422424RN6	26.09
Disabled refuge point			431186RN6	13.59