




DATASHEET
3 Wheeled Power Tugs
397305



Specifications 397305


Frame	Steel, powder coated
Drive	24V DC, 600W, 100 rpm
Weight	256 kg
Weight trailer	2500 kg
Battery	Built in, 24V, 75 Ah
Speed	Max. 4,7 km/h
Drive wheels	Full rubber ø250x80 mm
Width	511mm
Length	757mm
Adze height	700-1278 (variable)
Folded	N/A
Noise level	68,5 dB
To use from	-40 °C / 70 °C
Protection class	Machine IP44

Pulling power 397305 (in kg)

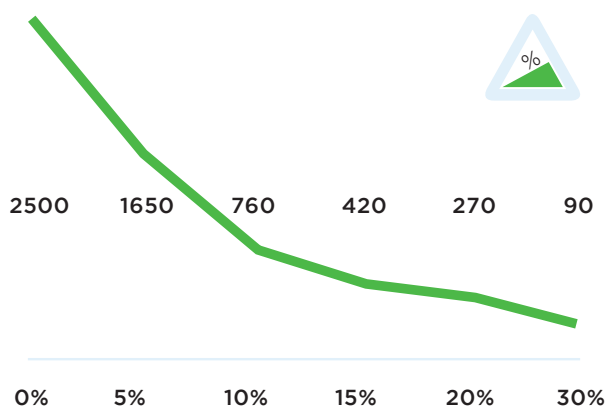

**Measured with a trolley with 2 swivelwheels and 2 fixed castors.
Wheel diameter: 160mm*

Dimensions 397305

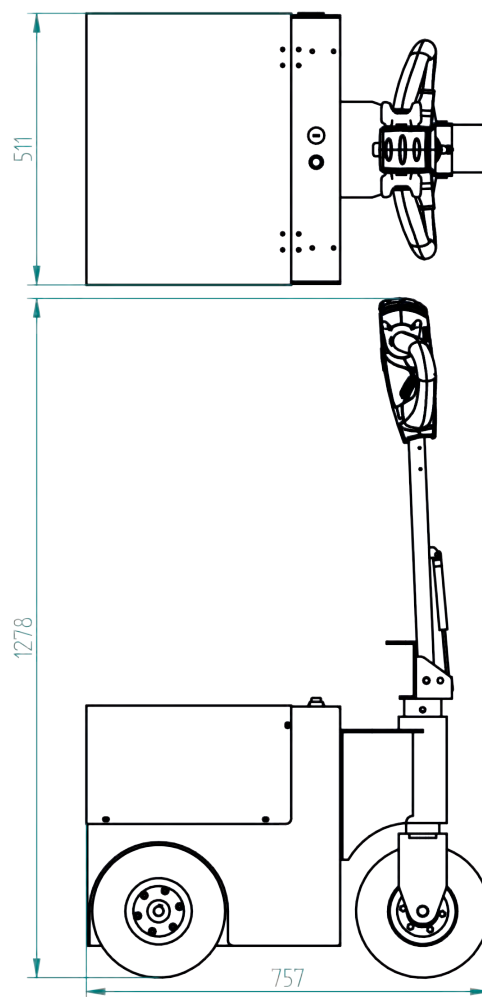

Standard 397305



Standard parts 397305

Battery 12V-80A



Battery charger 24V 10A
AGM external ind



Full-rubber drive wheel,
black Ø250mm



Dimensions Ø250 x 80 mm

Adjustable tillerhead



Safety switch



2 programmable speeds



Standard parts 397305

Engine 600W 100RPM
BRAKE 6911413X



LED battery indicator
LBF318-24V



Options T2500



Upgrade Nonmarking
tires (3) yellow CR

Article number:
OPT0356



Upgrade Nonmarking
tires (3) grey

Article number:
OPT0358



Horn 103 dB

Article number:
OPT0059



Emergency stop complete

Article number:
OPT0063



Strobelight

Article number:
OPT0065



Bumper bottom T2500

Bump for T2500

Article number:
OPT0078



Safety fender for steering
wheel

Wheel Shield

Article number:
OPT0079



Strobelight on pole T2500

Article number:
OPT0119



Acoustic signal driving
backwards

Article number:
OPT0254



Radio remote

6-channel

Article number:
OPT0026-5



Push Bar

Article number:
OPT0048



hour counter complete

Article number:
OPT0056

Horn 90dB



Antistatic strip



Code lock



Preparation electric hook



Ignition key unequal key



Ignition key equal key 701



Drive protection



Tiller head in straight up position

Customized programming



please indicate specific settings

Maximum weight



Conversion to Push machine



Programmer for Italsea



Options 397305



Charging station incl. 1 battery pack

Inclusive one battery pack 24V 75Ah, meant for T2500/T3500




U-Frame for waste container 1000/1100L



Adaptor for shopping trolleys (90°)

adjustable in width

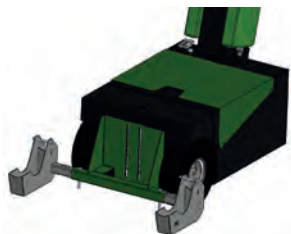


Adaptor for loggagetrolleys (90°)


adjustable in width



Base part hook 90°

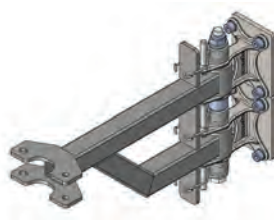

Base part heavy hook 90° lowered



Base part heavy hook 90° raised



Base part hook 90° manual control




Base part hook 90° double spring



Hook for LKE Platformwagon Type X




Hook K-Hartwall dolly
DOS1617/1636 90°

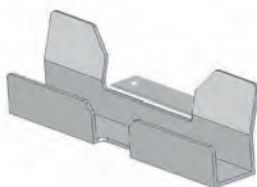

HA250.35.30.0.0

*Hook for 30 mm. Profile For
furniture trolley*

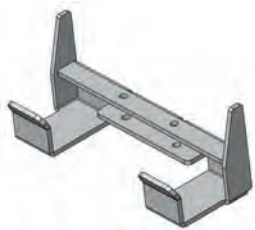

HA245.55.45.15.0

*Fronthook for 50mm. Profile,
Heavy Duty Hook*



Pen for Drawbar Ø16 incl.
Backplate



Towbar f



Towbar + pin Ø15mm incl.
Back plate



Pen for Drawbar Ø10 incl.
Backplate



hitch ball coupling Ø
50mm incl. adapter



Folding Hook, diameter 16



Folding Hook, diameter 20



Folding Hook, diameter 25




Folding Hook, diameter 27



Folding Hook, diameter 32



Folding Hook, diameter 35



Pin drawbar Ø35 complete



Hook locking system



Folding hook for flower trolleys



Electrical locking module for hook



Heavy Duty Liftmodule

Options 397305



HA270.43.40.0.0

Fronthook for 40mm. profile. Hartwall Pallet-Trolley (DOS1870)



HA250.43.35.0.0

Front hook 40mm. profile




HD370.73.35.0.40

Fronthook for 70mm. profile (Flower container)



HA245.142.35.0.0

Fronthook for 140mm. profile (wooden trolley)



Trailer coupling with frame pin Ø25mm



HA250.23.27.0.0

Fronthook for 20mm. profile




HB245.60.45.30.0

Fronthook for FEIL plastic floor trolley



HA250.28.30.0.0

Fronthook for 25mm. profile

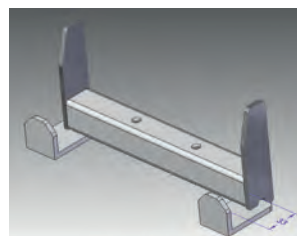

HA250.33.30.0.0

Fronthook for 30mm. profile




HF242.23.30.15.20

Fronthook for 20 mm. profile (Hospital Logistics)




Spring hitch 16 mm

Pin 16 mm.



HA250.23.20.0.0

Hook for 20 mm. profile



HB135.18.20.35.0

*Fronthook for 15mm. profil
(Hartwall Dolly 400x600)*



Towing hook with pin $\varnothing 32$



Coupling nettingscontainer,

Nettings 6mm



Coupling rollcontainer

Nettings 10mm.




Coupling Rollcontainer

Width 42 mm.



Coupling with carabiners

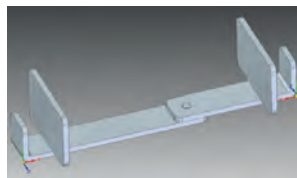


Coupling jaw 20mm



Coupling trolleys side R28



Coupling Open Front-Closed Backside



Welding part for trolley's

Profile 50x50mm.




Bolt-on part for Trolley's

Profile 50x50mm.



Angle limitation

Stainless steel



Diagnostic connector



H.C Slingsby plc

Otley Road
BD17 7LW

Tel 0800 294 4440

E-mail info@poweredhandling.com