



DATASHEET

3 Wheeled Powered Tugs



397306




Specifications 397306

Frame	Steel, powder coated
Drive	24V DC, 1100W, 90 rpm
Weight	700 kg
Weight trailer	6000 kg
Battery	Built in, 24V, 75Ah
Speed	Max. 4,2 km/h
Drive wheels	Full rubber ø250x80 mm
Width	807mm
Length	1000mm
Adze height	1267mm (variable)
Folded	N/A
Noise level	68,5 dB
To use from	-40 °C / 70 °C
Protection class	Machine IP44

Dimensions 397306

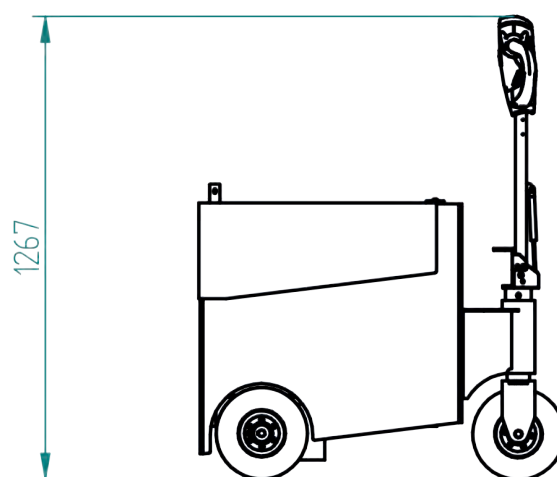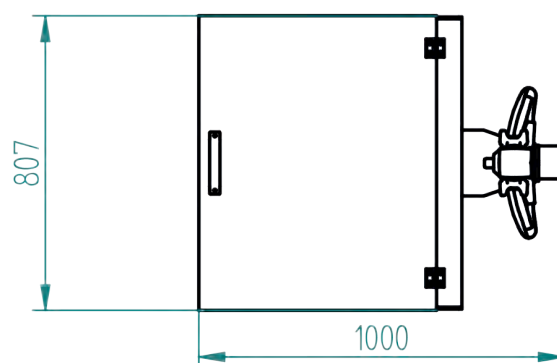

Pulling power 397306 (in kg)

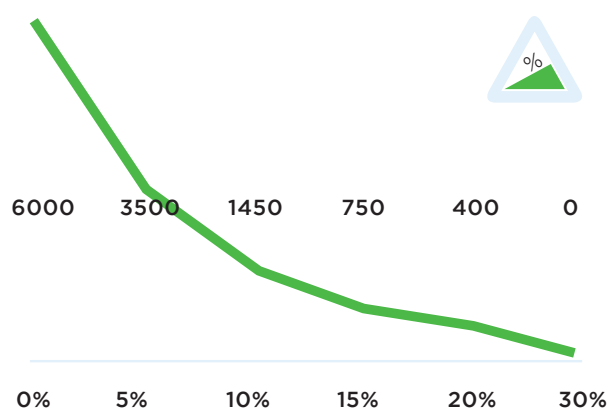

**Measured with a trolley with 2 swivelwheels and 2 fixed castors.
Wheel diameter: 160mm*

Standard 397306



Standard parts 397306

Battery 12V-80A



Battery charger 24V 20A
AGM external ind



Full-rubber drive wheel,
black Ø250mm



Adjustable tillerhead



Safety switch




2 programmable speeds



Standard parts 397306

Engine 1100W 90RPM
BRAKE 6911450X



LED battery indicator
LBF318-24V





Upgrade Nonmarking
tires (3) grey



Horn 103 dB



Emergency stop complete



Strobelight



Safety fender for steering
wheel

Wheel Shield



Acoustic signal while
driving



Acoustic signal driving
backwards



Push Bar



hour counter complete




Horn 90dB



Antistatic strip



Code lock



Preparation electric hook



Ignition key unequal key



Ignition key equal key 701



Customized programming


please indicate specific settings




Maximum weight



U-Frame for waste container 1000/1100L

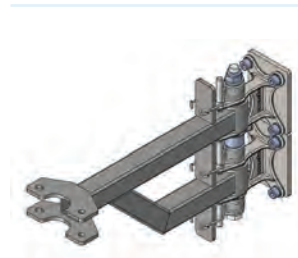


Base part heavy hook 90° lowered

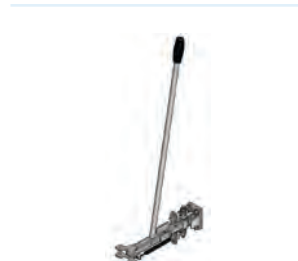

Base part hook 90° manual control



Programmer for Italsea



HA245.55.45.15.0

*Fronthook for 50mm. Profile,
Heavy Duty Hook*




hitch ball coupling Ø
50mm incl. adapter



Towbar for E-frame

Suitable for OPT0067



HA250.35.30.0.0

*Hook for 30 mm. Profile For
furniture trolley*



Folding Hook, diameter 16



Towbar + pin Ø15mm incl.
Back plate



Pen for Drawbar Ø10 incl.
Backplate



Hook for LKE Platformwa-
gon Type X



Hook K-Hartwall dolly
DOS1617/1636 90°



Folding Hook, diameter 20



Folding Hook, diameter 25




Folding Hook, diameter 27



Folding Hook, diameter 32



Folding Hook, diameter 35



Pin drawbar Ø35 complete



Electrical locking module for hook



Heavy Duty Liftmodule



HD370.73.35.0.40

*Fronthook for 70mm. profile
(Flower container)*



HA270.43.40.0.0

*Fronthook for 40mm. profile. Hartwall Pallet-Trolley
(DOS1870)*



HA250.43.35.0.0

Front hook 40mm. profile

Options 397306



HA245.142.35.0.0

*Fronthook for 140mm. profile
(wooden trolley)*



Trailer coupling with
frame pen Ø25mm




HB245.60.45.30.0

*Fronthook for FEIL plastic floor
trolley*



HA250.28.30.0.0

Fronthook for 25mm. profile



HA250.33.30.0.0

Fronthook for 30mm. profile



Spring hitch 16 mm

Pin 16 mm.



Towing hook with pin ø32




Coupling Rollcontainer


Width 42 mm.



Coupling with carabiners



Coupling jaw 20mm




Coupling trolleys side R28



Coupling Open Front-Clo-
sed Backside

Options 397306

Welding part for trolley's



Profile 50x50mm.

Bolt-on part for Trolley's




Profile 50x50mm.

Angle limitation



Stainless steel

Diagnostic connector





H.C Slingsby plc

Otley Road
BD17 7LW

Tel 0800 294 4440

E-mail info@poweredhandling.com