



Rid-on Powered Tug


383265



Specifications 383265


Frame	Steel, powder coated
Drive	24V DC, 420W, 140 rpm
Weight	120 kg
Weight trailer	1000 kg
Battery	Exchangable batterypack
Speed	Max. 6,6 km/h
Drive wheels	Full rubber ø250x80 mm
Width	450mm
Length	1226mm
Adze height	750-1261mm
Folded	900mm
Noise level	63,8 dB
To use from	-40 °C / 70 °C
Protection class	Machine IP44

Pulling power 383265

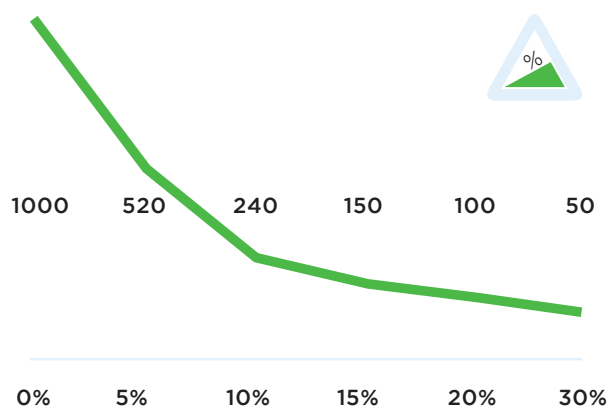

**Measured with a trolley with 2 swivelwheels and 2 fixed castors.
Wheel diameter: 160mm*

Dimensions 383265

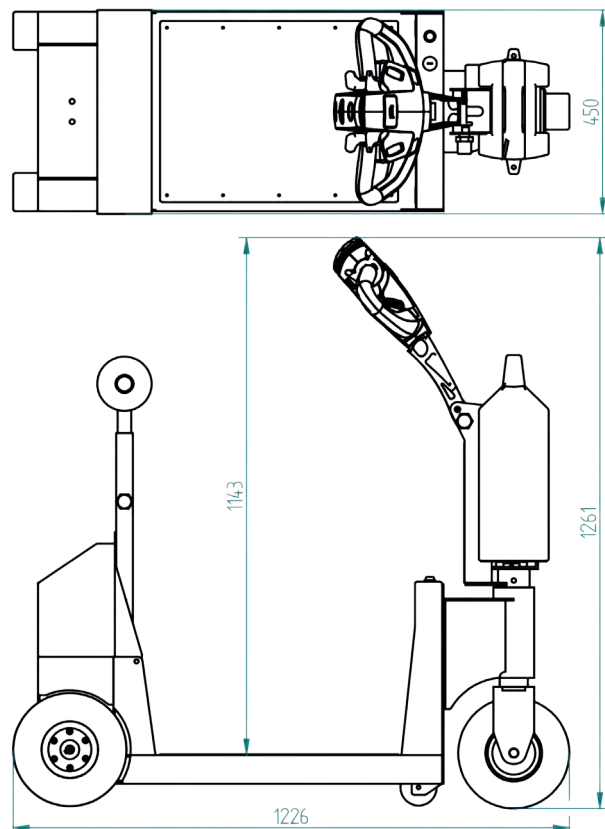

Standard 383265



Standard parts 383265

Battery charger Lithium
29,4V-10A



Battery Lithium-LiFePO4,
36Ah GREEN



Full-rubber drive wheel,
black Ø250mm



Dimensions Ø250 x 80 mm

Adjustable tillerhead



2 programmable speeds



Standard parts 383265

Engine 420W 140RPM
BRAKE 6911439X



LED battery indicator
LBF318-24V



Options 383265



Motor 530W 170RPM+-
REM instead 420W



Battery Lithium-LiFePO4,
36Ah GREEN



Upgrade Nonmarking
tires (3) yellow CR



Upgrade Nonmarking
tires (3) grey



Horn 90dB



Horn 103 dB



Emergency stop complete



Strobelight cast iron tiller
head



Safety fender for steering
wheel

Wheel Shield



Strobelight



Blue Safety spot



Acoustic signal while
driving



Acoustic signal driving backwards



Tool/coupling box



Radio remote control

6 channel



hour counter complete




Antistatic strip



Code lock



Document holder

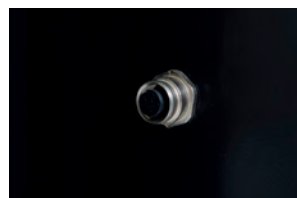

Preparation electric hook



Ignition key unequal key



Ignition key equal key 701



Customized programming

please indicate specific settings



Programmer for Italsea



Wall mounted Charger, for AGM battery

Complete charger-unit Including AGM battery charger (5 Ah)



Charging Station for 1 Lithium battery

Wallmounting chargerstation with lithium battery charger 29,2 V, 10 A



Charging station for 5 Lithium batteries



Charging station for 5 batteries

Upright standing charging station with five separate AGM battery chargers 24 V, 5 A



Upgrade to charging station



Base part hook 90°




Base part hook 90° double spring



Base part hook 90° manual control



U-Frame for waste container 1000/1100L

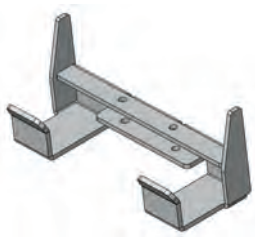

HA245.55.45.15.0


*Fronthook for 50mm. Profile,
Heavy Duty Hook*




Pen for Drawbar Ø16 incl.
Backplate



hitch ball coupling Ø
50mm incl. adapter



Hook K-Hartwall dolly
DOS1617/1636 90°



HA250.35.30.0.0

*Hook for 30 mm. Profile For
furniture trolley*



Towbar

Suitable for OPT0067



Towbar + pin Ø15mm incl.
Back plate



Pen for Drawbar Ø10 incl.
Backplate



Hook for LKE Platformwa-
gon Type X



Folding Hook, diameter 16



Folding Hook, diameter 20



Folding Hook, diameter 25



Folding Hook, diameter 27



Folding Hook, diameter 32



Folding Hook, diameter 35



Pin drawbar Ø35 complete



Hook locking system




Electric lifting module for Hooks



Folding hook for flower trolleys



Electrical locking module for hook



HA270.43.40.0.0

Fronthook for 40mm. profile. Hartwall Pallet-Trolley (DOS1870)



HA250.43.35.0.0

Front hook 40mm. profile




HD370.73.35.0.40

Fronthook for 70mm. profile (Flower container)



HA245.142.35.0.0

Fronthook for 140mm. profile (wooden trolley)



Trailer coupling with frame pen Ø25mm



HA250.23.27.0.0

Fronthook for 20mm. profile




HB245.60.45.30.0

Fronthook for FEIL plastic floor trolley



HA250.28.30.0.0

Fronthook for 25mm. profile

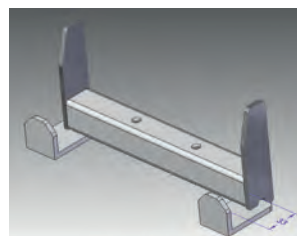

HA250.33.30.0.0

Fronthook for 30mm. profile




HF242.23.30.15.20

Fronthook for 20 mm. profile (Hospital Logistics)



Spring hitch 16 mm



HA250.23.20.0.0

Hook for 20 mm. profile



Coupling nettingscontainer,

Nettings 6mm



Coupling rollcontainer

Nettings 10mm.




Coupling Rollcontainer

Width 42 mm.



Coupling with carabiners



Coupling jaw 20mm



Coupling trolleys side R28



Coupling Open Front-Closed Backside




Storage compartment lid T1000-PLATFORM



Angle limitation

Stainless steel




Welding part for trolley's

Profile 50x50mm.



Bolt-on part for Trolley's

Profile 50x50mm.




Diagnostic connector



Frameplastic crate
T1000-PLATFORM



Detection matt for PLAT-
FORM machine

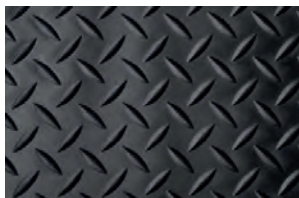

Treadplate rubber
T1000-PLATFORM



HC Slingsby plc

Otley Road
BD17 7LW

Tel 0800 294 4440

E-mail info@poweredhandling.com