





DATASHEET
Powered Tug
397304




Specifications 397304

Frame	Steel, powder coated
Drive	24V DC, 600W, 100 rpm
Weight	105 kg
Weight trailer	1500 kg
Battery	Exchangable batterypack
Speed	Max. 4,7 km/h
Drive wheels	Full rubber ø250x80 mm
Width	483mm
Length	876mm
Adze height	750-1177mm (variable)
Folded	770mm
Noise level	68,5 dB
To use from	-40 °C / 70 °C
Protection class	Machine IP44

Dimensions 397304

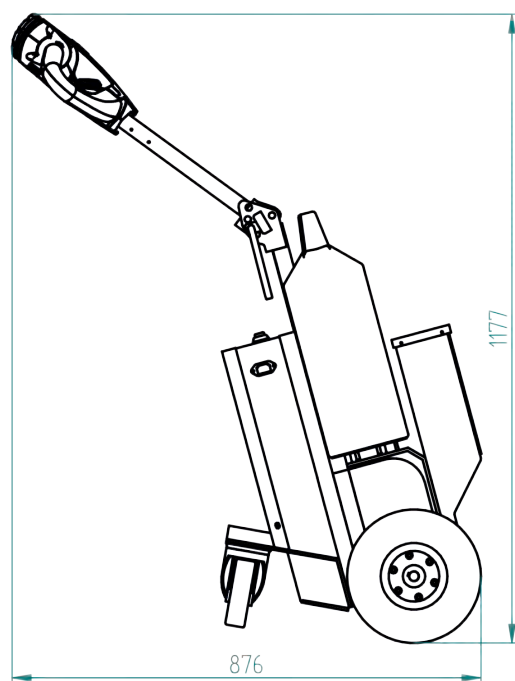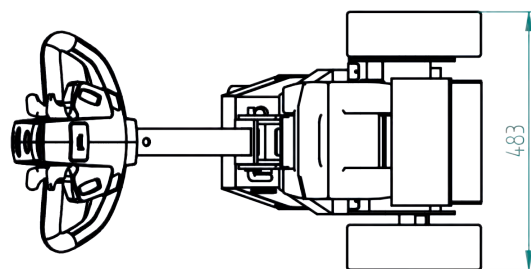

Pulling power 397304 (in kg)

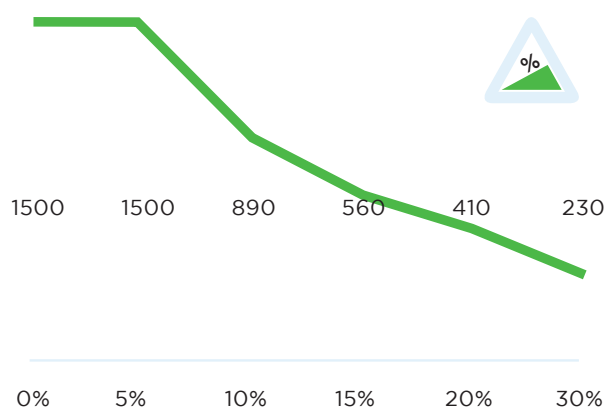

**Measured with a trolley with 2 swivelwheels and 2 fixed castors.
Wheel diameter: 160mm*

Standard 397304



Standard parts 397304

Charger 24V 5A incl. charging cable



Batterie AGM 22Ah



Full-rubber drive wheel, black Ø250mm



Dimensions Ø250 x 80 mm

Adjustable tillerhead



Safety switch



2 programmable speeds



Standard parts 397304

Engine 600W 100RPM
BRAKE 6911413X



LED battery indicator
LBF318-24V



Options 397304



Extra plug to recharge the battery

for on-machine batterie charging



Battery Lithium-LiFePO4, 36Ah GREEN



Battery upgrade to Lithium-LiFePO4, 36Ah

iso AGM Battery (!) Including upgrade to lithium charger 10A



Batterie AGM 22Ah



Upgrade Nonmarking tires (2) yellow CR



Upgrade Nonmarking tires (2) grey



Upgrade Foam filled tires (2) black



Upgrade Foamfilled tyres Nonm. (2) grey



Emergency stop complete



Strobelight



Acoustic signal driving backwards



Radio remote control

6 channal



Document holder with clip



hour counter complete




Horn 90dB



Antistatic strip



Code lock



Preparation electric hook



Ignition key unequal key



Ignition key equal key 701



Customized programming

please indicate specific settings



Programmer for Italsea



Wall mounted Charger, for AGM battery

Complete charger-unit Including AGM battery charger (5 Ah)



Charging Station for 1 Lithium battery

Wallmounting chargerstation with lithium battery charger 29,2 V, 10 A

Options 397304



Charging station for 5
Lithium batteries



Charging station for 5
batteries

*Upright standing charging
station with five separate AGM
battery chargers 24 V, 5 A*



Attachment for trolley
(Caddie)



Frame for 4-wheel waste
container




U-Frame for waste container
1000/1100L



Upgrade to charging
station



Adaptor for Airport Trolleys




Adaptor for shopping
trolleys on T1000




Base part hook 15°



Base part hook 15° double
spring



Base part heavy hook 15°
lowered



Base part heavy hook 15°
raised

Options 397304




hitch ball coupling Ø
50mm incl. adapter



Hook for LKE Platformwa-
gon Type X




Hook locking system



HA245.55.45.15.0

*Fronthook for 50mm. Profile,
Heavy Duty Hook*



HA250.35.30.0.0

*Hook for 30 mm. Profile For
furniture trolley*



Electrical locking module
for hook



Electric lifting module
T1500



HA250.28.30.0.0

Fronthook for 25mm. profile



HA270.43.40.0.0

Fronthook for 40mm. profile. Hartwall Pallet-Trolley (DOS1870)



HA250.43.35.0.0

Front hook 40mm. profile



HB245.43.30.5.0

Fronthook for 40mm. profile



HD370.73.35.0.40

Fronthook for 70mm. profile (Flower container)



HA245.142.35.0.0

Fronthook for 140mm. profile



HA250.23.27.0.0

Fronthook for 20mm. profile



Hook K-Hartwall dolly
DOS1617/1636, 25°




HD245.10.35.0.50

Fronthook for Hatchery trolleys (EMKA)




HB245.60.45.30.0

Fronthook for FEIL plastic floor trolley



HA250.33.30.0.0

Fronthook for 30mm. profile




Clamping Hook Stainless steel



HF242.23.30.15.20

*Fronthook for 20 mm. profile
(Hospital Logistics)*



HA250.23.20.0.0

Hook for 20 mm. profile



HB135.18.20.35.0

*Fronthook for 15mm. profile
(Hartwall Dolly 400x600)*



Coupling nettingscontainer,

Nettings 6mm



Coupling rollcontainer

Nettings 10mm.



Coupling Rollcontainer

Width 42 mm.




Coupling Rollcontainer

Suitable for rack Ø6 mm.(Deli XL)



Coupling with carabiners



Coupling jaw 20mm




Coupling trolleys side R28

Options 397304



Coupling Open Front-Closed Backside



Welding part for trolley's

Profile 50x50mm.




Bolt-on part for Trolley's


Profile 50x50mm.



Angle limitation hook 15 degrees



Protective elec connection T1000

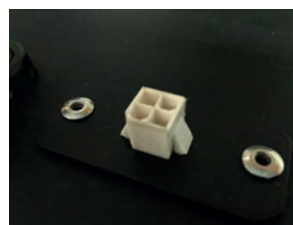

Diagnostic connector



HC Slingsby plc

Otley Road
BD17 7LW

Tel 0800 294 4440

E-mail info@poweredhandling.com